


## TPA-020520M50



### 外形尺寸

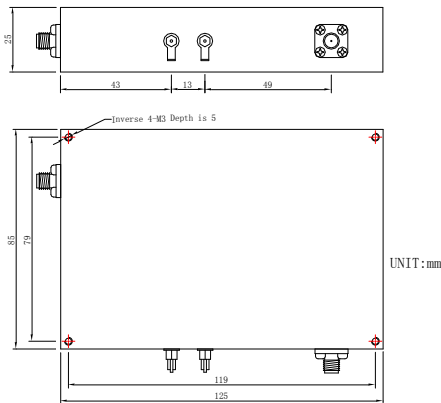

### 测试曲线 (Temp @+25°C)

■ 频率范围	20 - 520MHz
■ 增益	40.0dB

### 技术指标@25°C

频率范围	20-520MHz
增益	40.0dB
增益平坦度	±2.0dB typ
输出功率Psat	47.0dBm
反向隔离	55.0dB
OIP3	56.0dBm
输入端口驻波	2.0:1
输出端口驻波	2.0:1
电压	26.0V
电流(最大值)	6.0A
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
直流电压	28V
射频入口功率(最大值)	+8dBm

### 订单描述

TPA-020520M50



指标特性

